


INFO

exflex Tool system



01 exflex Tool

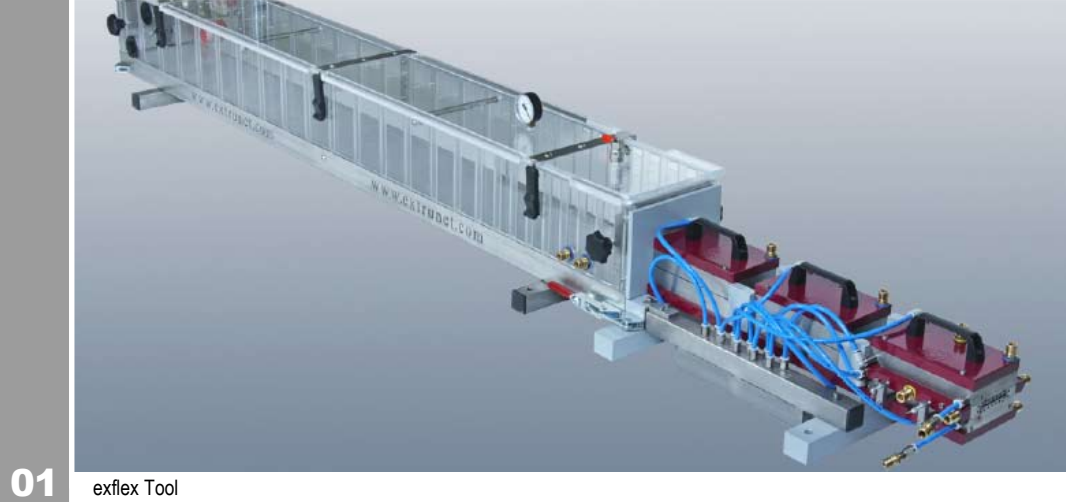


02 exflex calibrator



03 exflex Dual-strand

extrunet | exflex tool system



CONFIGURATION

exflex tool system

Our unique **exflex** tooling system minimize the daily process and reduce costs already in the first place.

- Single wall-/chamber profiles starting from 0.8mm to 135x25 /60x60
- Single and multi strand tools for a variety of materials like R-PVC, S-PVC, ABS, PP, PE, PS, PC, TPE, TPU, PMMA, HDPE, LDPE
- Shortest possible change over
- Cutting-edge **exflex** water-/vacuum tank
- One adapter/bushing to be used with all exflex dies
- Shortest possible lead times due the use of standardized pre-manufactured components

consisting of:

- Die with heater band
- Dry- /wet calibrator
- Tank plates
- Water- /vacuum tank

Material Aluminum / 1.2316
Water- /vacuum connections ABA 1/2"

exflex tool adapter

This tooling adapter can be used with all **exflex** dies.

Universal designed, to achieve shortest possible change over times as well to reduce the amount of parts overall.

consisting of:

- 1 exflex tooling adapter fitting to all exflex dies
- 1 heater band for exflex tooling adapter
- 1 connection bushing

exflex water- /vacuumtank

To relieve your daily work we have developed the **exflex** tank for you.

Based on a goal oriented and universal tank design, mix-ups and a overall high amount of parts is now in the past.
Useable as water bath or whirl tank.


Standardization, at highest quality, is our motto !

consisting of:

- **exflex** water- /vacuum tank with a length of 2m
- Stainless Steel base frame with plexiglas
- Symmetrical design to be used as a left-/right executed tank
- 25 slots for tank plates (tank plates are not included)
- Numbers for slots in the lid



09

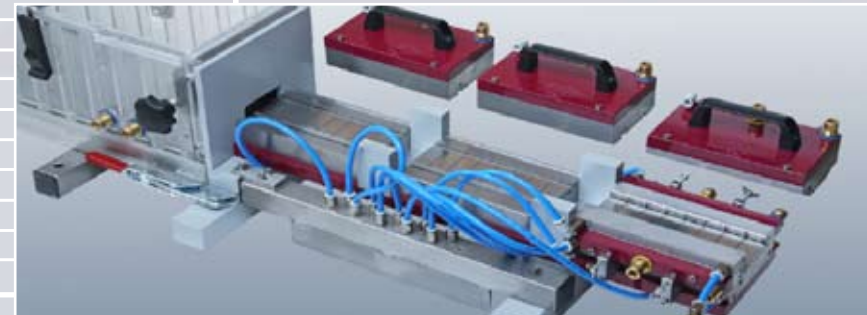


08



04

exfle die

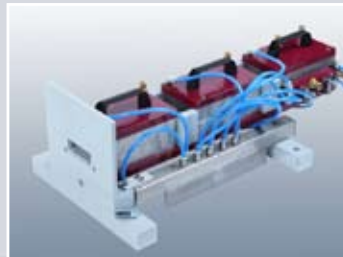

05

exflex dry calibrator



06

exflex water-/vacuumtank



07